



# LED FLEXSTRIP 10 – IP44 – Indoor (Kein Ausseneinsatz) | CRI/RA 95+

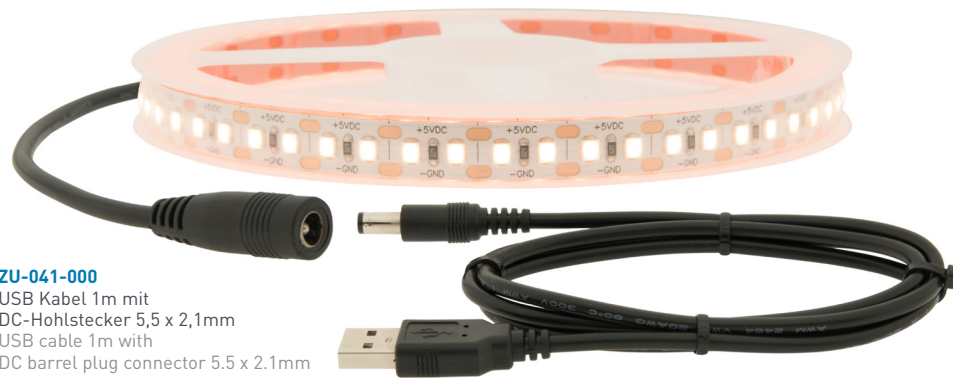

**ZU-041-000**  
 USB Kabel 1m mit DC-Hohlstecker 5,5 x 2,1mm  
 USB cable 1m with DC barrel plug connector 5.5 x 2.1mm

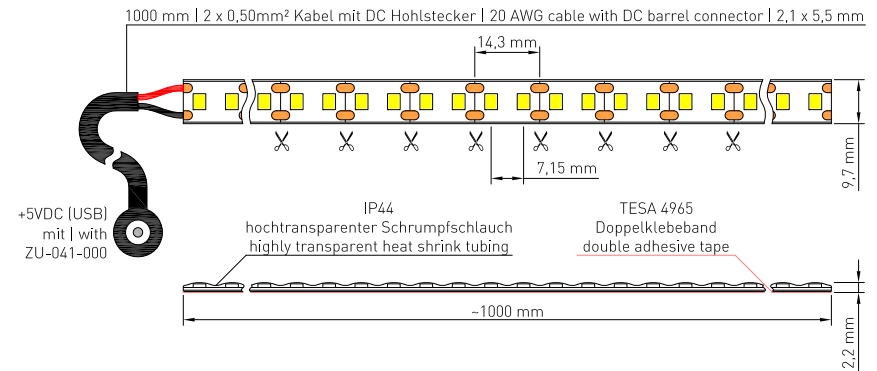

Die Flexstrip 10 sind 1m lange LED Streifen, die aufgrund ihrer 5VDC Technologie über USB mit Strom versorgt werden können. Dazu wird das USB Kabel (ZU-041-000) benötigt, welches sekundärseitig über einen DC-Hohlstecker 5,5x2,1mm verfügt. Diese LED Streifen werden steckerfertig mit 1m langem Anschlusskabel ausgeliefert, sind in 9 verschiedenen Lichtfarben erhältlich und können somit ideal für Bemusterungen oder mobile Lichtlösungen herangezogen werden.

The Flexstrip 10 are 1m long LED strips that can be powered via USB thanks to their 5VDC technology. This requires the USB cable (ZU-041-000) which has a 5.5x2.1mm DC barrel plug on the secondary side. These LED strips are delivered ready to plug in with a 1m long connection cable, are available in 9 different light colors and are therefore ideal for sampling or mobile lighting solutions.

IP44

5 VDC

1m

10W

3 SDCM

CRI RA 95+

140 SMD 2835

120°

1,43cm

-20°C - +45°C

☀️

⚠️

CE

FARBMUSTER COLOR PATTERN	ARTIKEL NR. ITEM No.	BEZEICHNUNG LABEL	LICHTFARBTEMPERATUR LIGHT COLOUR TEMPERATURE	LICHTSTROM   EFFIZIENZ LIGHT FLUX   EFFICIENCY	ENERGY CLASS ErP	ANSCHLUSSLEISTUNG POWER RATING
	<b>FS-010-M20</b>	Candle Light Weiss (CLW) Candle Light White (CLW)	2000K +/- 50K   3-SDCM	600lm/m   53lm/W		max. 11W/m
	<b>FS-010-M25</b>	Ultra Warm Weiss (UWW) Ultra Warm White (UWW)	2500K +/- 60K   3-SDCM	710lm/m   65lm/W		max. 11W/m
	<b>FS-010-M30</b>	Warm Weiss (WW) Warm White (WW)	3000K +/- 75K   3-SDCM	730lm/m   65lm/W		max. 11W/m
	<b>FS-010-M35</b>	Halogen Weiss (HW) Halogen White (HW)	3500K +/- 100K   3-SDCM	760lm/m   68lm/W		max. 11W/m
	<b>FS-010-M40</b>	Neutral Weiss (NW) Neutral White (NW)	4000K +/- 120K   3-SDCM	810lm/m   71lm/W		max. 11W/m
	<b>FS-010-M60</b>	Kalt Weiss (CW) Cold White (CW)	6000K +/- 270K   3-SDCM	810lm/m   71lm/W		max. 11W/m
	<b>FS-010-M06</b>	Rot (R) Red (R)	617nm - 622nm	340lm/m   31lm/W		max. 11W/m
	<b>FS-010-M07</b>	Grün (G) Green (G)	515nm - 520nm	760lm/m   66lm/W		max. 11W/m
	<b>FS-010-M08</b>	Blau (B) Blue (B)	462nm - 467nm	160lm/m   14lm/W		max. 11W/m



Preis & Verfügbarkeit  
Price and Availability



Messprotokolle  
Measurement protocols



EPREL Energielabels  
EPREL Energy labels



Montagerichtlinien  
Assembly guidelines

Weitere Informationen mittels QR Code  
Further information via QR code