











LED Profil KLI | max. LED Leistung pro Meter: 16W → Flexstrip 80

ALUMINIUM PROFIL ALUMINIUM PROFILE	
	
<p>AP-008-002 Natur eloxiert Natural anodized AP-008-102 Schwarz eloxiert Black anodized Aluminium Profil KLI Aluminium profile KLI</p>	

PROFIL ABDECKUNGEN PROFILE COVERS	
<p>$\eta \approx 46\%$</p>   <p>AB-008-003 PMMA Abdeckung KL Flach Opal PMMA cover KL flat milky</p>	<p>$\eta \approx 51\%$</p>   <p>AB-008-009 PMMA Abdeckung KL Eckig Opal PMMA cover KL square milky</p>

PROFIL ENDKAPPEN PROFILE ENDCAPS	
<p>Endkappenstärke End cap thickness 1,0mm</p>  <p>EK-008-200 Natur eloxiert Natural anodized EK-108-200 Schwarz eloxiert Black anodized KLI Flach geschlossen KLI flat closed</p>	<p>Endkappenstärke End cap thickness 1,0mm</p>  <p>EK-008-220 Profil Endkappe KLI Eckig geschlossen Profile endcap KLI square closed</p>
<p>Endkappenstärke End cap thickness 1,0mm</p>  <p>EK-008-201 Natur eloxiert Natural anodized EK-108-201 Schwarz eloxiert Black anodized KLR Flach mit Langloch KLR flat with cable entry</p>	<p>Endkappenstärke End cap thickness 1,0mm</p>  <p>EK-008-221 Profil Endkappe KLI Eckig mit Langloch Profile endcap KLI square with cable entry</p>

1m	2m	4m	SONDER LÄNGE	SPECIAL LENGTH
----	----	----	--------------	----------------

STANDARDLÄNGE = 2M | ALLE ANDEREN LÄNGEN SIND VOM UMTAUSCH UND DER RÜCKGABE AUSGESCHLOSSEN. LÄNGEN ÜBER 2M WERDEN MITTELS SPEDITION VERSENDET UND ERFORDERN EINE MINDESTBESTELLMENGE VON 10 STK.


STANDARD LENGTH = 2M | ALL OTHER LENGTHS ARE EXCLUDED FROM EXCHANGE AND RETURN. LENGTHS OVER 2M ARE SHIPPED BY FREIGHT CARRIER AND REQUIRE A MINIMUM ORDER QUANTITY OF 10 PCS.

HINWEIS PLEASE NOTE	
<p>Kunststoff und Aluminium besitzen unterschiedliche Ausdehnungskoeffizienten, welche bei der Montage zu berücksichtigen sind. Ausgehend von 20°C verändert sich die Länge beim Aluminium um ca. 0,25mm pro Meter und beim Kunststoff um ca. 0,70mm pro Meter je 10°C Temperaturunterschied.</p>	<p>Plastic and aluminium have different expansion coefficients, which must be considered during assembly. Based on 20°C the length of aluminium changes approximately 0,25mm per meter and plastic approximately 0,70 mm per meter per 10°C of difference in temperature.</p>




MONTAGEMÖGLICHKEITEN | MOUNTING POSSIBILITIES

Einbau in einer 19mm starken Holzplatte
installation in a 19mm thick wooden panel

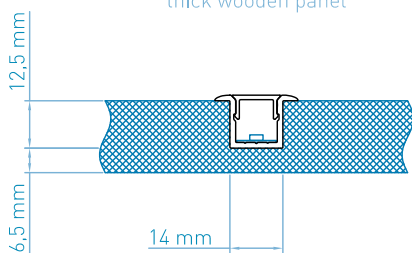

Einbau in einer 12,5mm starken Gipsfaserplatte
installation in a 12.5mm thick plasterboard



Einbau bei 10mm starken Fliesen + 2,5mm Fliesenkleber
installation with 10mm thick tiles + 2.5mm tile adhesive

