









LED Profil KLR | max. LED Leistung pro Meter: 16W → Flexstrip 80

ALUMINIUM PROFIL ALUMINIUM PROFILE	
	
<p>AP-008-001 Natur eloxiert Natural anodized AP-008-101 Schwarz eloxiert Black anodized Aluminium Profil KLR Aluminium profile KLR</p>	

PROFIL ABDECKUNGEN PROFILE COVERS	
<p>$\eta \approx 48\%$ $\eta \approx 36\%$</p>  	<p>$\eta \approx 53\%$ $\eta \approx 42\%$</p>  
<p>AB-008-003 PMMA Abdeckung KL Flach Opal PMMA cover KL flat milky</p>	<p>AB-008-009 PMMA Abdeckung KL Eckig Opal PMMA cover KL square milky</p>

PROFIL ENDKAPPEN PROFILE ENDCAPS	
<p>Endkappenstärke End cap thickness 1,0mm</p> 	<p>Endkappenstärke End cap thickness 1,0mm</p> 
<p>EK-008-100 Natur eloxiert Natural anodized EK-108-100 Schwarz eloxiert Black anodized KLR Flach geschlossen KLR flat closed</p>	<p>EK-008-120 Profil Endkappe KLR Eckig geschlossen Profile endcap KLR square closed</p>
<p>Endkappenstärke End cap thickness 1,0mm</p> 	<p>Endkappenstärke End cap thickness 1,0mm</p> 
<p>EK-008-101 Natur eloxiert Natural anodized EK-108-101 Schwarz eloxiert Black anodized KLR Flach mit Langloch KLR flat with cable entry</p>	<p>EK-008-121 Profil Endkappe KLR Eckig mit Langloch Profile endcap KLR square with cable entry</p>

1m	2m	4m	SONDER LÄNGE	SPECIAL LENGTH
----	----	----	--------------	----------------

STANDARDLÄNGE = 2M | ALLE ANDEREN LÄNGEN SIND VOM UMTAUSCH UND DER RÜCKGABE AUSGESCHLOSSEN. LÄNGEN ÜBER 2M WERDEN MITTELS SPEDITION VERSENDET UND ERFORDERN EINE MINDESTBESTELLMENGE VON 10 STK.

STANDARD LENGTH = 2M | ALL OTHER LENGTHS ARE EXCLUDED FROM EXCHANGE AND RETURN. LENGTHS OVER 2M ARE SHIPPED BY FREIGHT CARRIER AND REQUIRE A MINIMUM ORDER QUANTITY OF 10 PCS.

HINWEIS PLEASE NOTE

Kunststoff und Aluminium besitzen unterschiedliche Ausdehnungskoeffizienten, welche bei der Montage zu berücksichtigen sind. Ausgehend von 20°C verändert sich die Länge beim Aluminium um ca. 0,25mm pro Meter und beim Kunststoff um ca. 0,70mm pro Meter je 10°C Temperaturunterschied.


Plastic and aluminium have different expansion coefficients, which must be considered during assembly. Based on 20°C the length of aluminium changes approximately 0,25mm per meter and plastic approximately 0,70 mm per meter per 10°C of difference in temperature.

ANWENDUNGSFOTO | APPLICATION PHOTO




MONTAGEMÖGLICHKEITEN | MOUNTING POSSIBILITIES

Einbau in einer 19mm starken Holzplatte
installation in a 19mm thick wooden panel

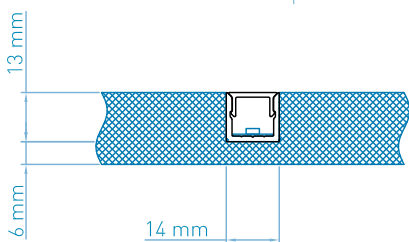

Einbau in einer 12,5mm starken Gipsfaserplatte
installation in a 12.5mm thick plasterboard



Einbau bei 10mm starken Fliesen + 3mm Fliesenkleber
installation with 10mm thick tiles + 3mm tile adhesive

