

LED Profil LBS & LBK & LBKI | max. LED Leistung pro Meter: 28W → Flexstrip 115

ALUMINIUM PROFILE & ABDECKUNGEN ALUMINIUM PROFILES & COVERS		
<p>AP-001-006 Aluminium Profil LBS (Schwenkprofil) Aluminium profile LBS (Swivelling profile)</p> <p>Dimensions: 26,7 mm height, 16 mm width, 17 mm inner width, 29,9 mm outer width.</p>	<p>AP-001-106 Aluminium Profil LBK (Klipsprofil) Aluminium profile LBK (clips profile)</p> <p>Dimensions: 16,7 mm height, 30 mm width, 31,7 mm outer width.</p>	<p>AP-001-206 Aluminium Profil LBKI (Klipsprofil Einbau) Aluminium profile LBKI (clips profile mounting)</p> <p>Dimensions: 29,6 mm height, 40 mm width, 2,5 mm lip height, 15,1 mm lip width, 30 mm base width, 4,5 mm lip thickness.</p>

PROFIL ABDECKUNGEN UND EINSCHÜBE PROFILE COVERS AND INSETS		
<p>$\eta \approx 50\%$</p> <p>AB-001-001 PMMA Abdeckung LB Flach Transparent PMMA cover LB flat transparent</p> <p>Dimensions: 26,7 mm height, 14 mm width, 20,8 mm outer width.</p>	<p>$\eta \approx 33\%$</p> <p>AB-001-003 PMMA Abdeckung LB Flach Opal PMMA cover LB flat milky</p> <p>Dimensions: 26,7 mm height, 14 mm width, 20,8 mm outer width.</p>	<p>AB-001-100 Aluminium Abdeckung LB Aluminium cover LB</p> <p>Dimensions: 26,7 mm height, 14 mm width, 21,2 mm outer width.</p>
<p>$\eta \approx 46\%$</p> <p>AB-001-010 PMMA Abdeckung LB engstrahlend - Abstrahlwinkel 15° PMMA cover LB narrow beam - beam angle 15°</p> <p>Dimensions: 28,1 mm height, 14 mm width, 20,7 mm outer width.</p>	<p>$\eta \approx 45\%$</p> <p>AB-001-011 PMMA Abdeckung LB asymmetrisch - Abstrahlwinkel 17° PMMA cover LB asymmetrical - beam angle 17°</p> <p>Dimensions: 28,1 mm height, 14 mm width, 20,7 mm outer width.</p>	<p>AB-001-600 Aluminium Abdeckung LBK und LBKI Aluminium cover LBK and LBKI</p> <p>Dimensions: 16,7 mm height, 13,2 mm lip height, 30 mm width.</p>

PROFIL ENDKAPPEN PROFILE ENDCAPS	
<p>Endkappenstärke End cap thickness 2,5mm</p> <p>EK-001-600 Profil Endkappe LBS Flach geschlossen Profile endcap LBS flat closed</p>	<p>Endkappenstärke End cap thickness 2,5mm</p> <p>EK-001-602 Profil Endkappe LBK Flach geschlossen Profile endcap LBK flat closed</p>
<p>Endkappenstärke End cap thickness 2,5mm</p> <p>EK-001-601 Profil Endkappe LBS Flach mit Langloch Profile endcap LBS flat open with cable entry</p>	<p>Endkappenstärke End cap thickness 2,5mm</p> <p>EK-001-260 Profil Endkappe LBKI Flach geschlossen Profile endcap LBKI flat closed</p>

- 1m
- 2m
- 4m
- SONDER LÄNGE
- SPECIAL LENGTH





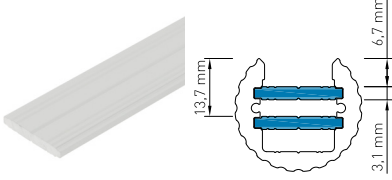
STANDARDLÄNGE = 2M | ALLE ANDEREN LÄNGEN SIND VOM UMTAUSCH UND DER RÜCKGABE AUSGESCHLOSSEN. LÄNGEN ÜBER 2M WERDEN MITTELS SPEDITION VERSENDET UND ERFORDERN EINE MINDESTBESTELLMENGE VON 10 STK.







STANDARD LENGTH = 2M | ALL OTHER LENGTHS ARE EXCLUDED FROM EXCHANGE AND RETURN. LENGTHS OVER 2M ARE SHIPPED BY FREIGHT CARRIER AND REQUIRE A MINIMUM ORDER QUANTITY OF 10 PCS.

HINWEIS PLEASE NOTE

Kunststoff und Aluminium besitzen unterschiedliche Ausdehnungskoeffizienten, welche bei der Montage zu berücksichtigen sind. Ausgehend von 20°C verändert sich die Länge beim Aluminium um ca. 0,25mm pro Meter und beim Kunststoff um ca. 0,70mm pro Meter je 10°C Temperaturunterschied.

Plastic and aluminium have different expansion coefficients, which must be considered during assembly. Based on 20°C the length of aluminium changes approximately 0,25mm per meter and plastic approximately 0,70 mm per meter per 10°C of difference in temperature.

PROFIL ZUBEHÖR PROFILE ACCESSORIES		
 <p>PZ-001-002 Seilabhängiger 2m inkl. Deckenbefestigung Wire suspension 2m incl. ceiling fixture</p> <p>PZ-001-005 Seilabhängiger 5m inkl. Deckenbefestigung Wire suspension 5m incl. ceiling fixture</p>	 <p>PZ-002-001 Seilstopper inkl. M4 Senkkopfschraube Wire stopper incl. M4 countersunk screw</p>	 <p>EK-100-002 Torx Bit TX8 für Endkappenschrauben Torx Bit TX8 for encap screws</p>
 <p>PZ-003-007 Einbau Montagewinkel CL und LBKI Mounting angle CL and LBKI</p>	 <p>AP-100-001 Aluminium Flachmaterial Aluminium flat material</p>	

					
0° Schwenkung Slewing	15° Schwenkung Slewing	30° Schwenkung Slewing	45° Schwenkung Slewing	60° Schwenkung Slewing	Abmessung Dimension

LBS PROFIL BESTÜCKT MIT FLEXSTRIP 36 RGB MIT EINEM LED ABSTAND VON 33MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN LBS PROFILE FITTED WITH FLEXSTRIP 36 RGB WITH A LED DISTANCE OF 33MM IN COMBINATION WITH THE DIFFERENT COVERS		
PMMA Abdeckung LB Flach Transparent 91% Transmission	PMMA Abdeckung LB Flach Opal 50% Transmission	PMMA Abdeckung LB Eckig Opal 50% Transmission
		
PMMA cover LB flat transparent 91% transmission	PMMA cover LB flat milky 50% transmission	PMMA cover LB square milky 50% transmission
LBS PROFIL BESTÜCKT MIT FLEXSTRIP 72 MIT EINEM LED ABSTAND VON 16,5MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN LBS PROFILE FITTED WITH FLEXSTRIP 72 WITH A LED DISTANCE OF 16.5MM IN COMBINATION WITH THE DIFFERENT COVERS		
PMMA Abdeckung LB Flach Transparent 91% Transmission	PMMA Abdeckung LB Flach Opal 50% Transmission	PMMA Abdeckung LB Eckig Opal 50% Transmission
		
PMMA cover LB flat transparent 91% transmission	PMMA cover LB flat milky 50% transmission	PMMA cover LB square milky 50% transmission
LBS PROFIL BESTÜCKT MIT FLEXSTRIP 48 ODER 72 DW MIT EINEM LED ABSTAND VON 7,15MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN LBS PROFILE FITTED WITH FLEXSTRIP 48 OR 72 DW WITH A LED DISTANCE OF 7.15MM IN COMBINATION WITH THE DIFFERENT COVERS		
PMMA Abdeckung LB Flach Transparent 91% Transmission	PMMA Abdeckung LB Flach Opal 50% Transmission	PMMA Abdeckung LB Eckig Opal 50% Transmission
		
PMMA cover LB flat transparent 91% transmission	PMMA cover LB flat milky 50% transmission	PMMA cover LB square milky 50% transmission