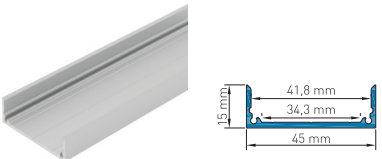
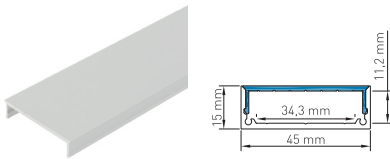
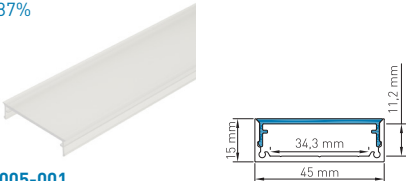
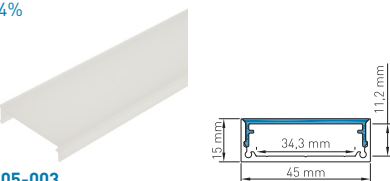
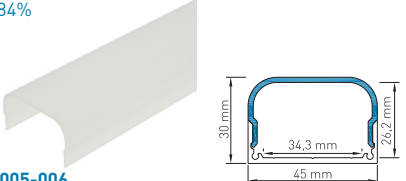
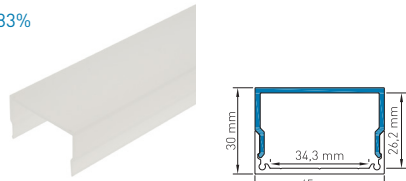
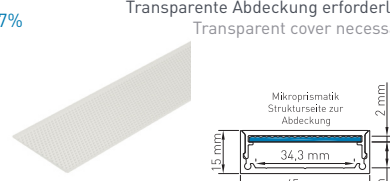
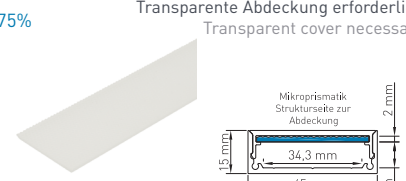


# LED Profil MFF | max. LED Leistung pro Meter: 38W → 1 x Flexstrip 160 oder 2 x Flexstrip 75

ALUMINIUM PROFILE & ABDECKUNGEN   ALUMINIUM PROFILES & COVERS	
 <p><b>AP-005-004</b> Aluminium Profil MFF Aluminium profile MFF</p>	 <p><b>AB-005-100</b> Aluminium Abdeckung MF Aluminium cover MF</p>

PROFIL ABDECKUNGEN UND EINSCHÜBE   PROFILE COVERS AND INSETS			
<p><math>\eta \approx 87\%</math></p>  <p><b>AB-005-001</b> PMMA Abdeckung MF Flach Transparent PMMA cover MF flat transparent</p>	<p><math>\eta \approx 74\%</math></p>  <p><b>AB-005-003</b> PMMA Abdeckung MF Flach Opal PMMA cover MF flat milky</p>	<p><math>\eta \approx 84\%</math></p>  <p><b>AB-005-006</b> PMMA Abdeckung MF Rund Opal PMMA cover MF round milky</p>	
<p><math>\eta \approx 83\%</math></p>  <p><b>AB-005-009</b> PMMA Abdeckung MF Eckig Opal PMMA cover MF square milky</p>	<p><math>\eta \approx 77\%</math></p> <p>Transparente Abdeckung erforderlich Transparent cover necessary</p>  <p><b>MP-005-001</b> Mikroprism. Einschub MF Transparent Microprismatic Inset MF transparent</p>	<p><math>\eta \approx 75\%</math></p> <p>Transparente Abdeckung erforderlich Transparent cover necessary</p>  <p><b>MP-005-003</b> Mikroprism. Einschub MF Opal Microprismatic Inset MF milky</p>	

PROFIL ENDKAPPEN   PROFILE ENDCAPS		
<p>Endkappenstärke   End cap thickness 2,5mm</p>  <p><b>EK-005-400</b> Profil Endkappe MFF Flach geschlossen Profile endcap MFF flat closed</p>	<p>Endkappenstärke   End cap thickness 2,5mm</p>  <p><b>EK-005-410</b> Profil Endkappe MFF Rund geschlossen Profile endcap MFF round closed</p>	<p>Endkappenstärke   End cap thickness 2,5mm</p>  <p><b>EK-005-420</b> Profil Endkappe MFF Eckig geschlossen Profile endcap MFF square closed</p>

- 1m
- 2m
- 4m
- SONDER LÄNGE
- SPECIAL LENGTH

STANDARDLÄNGE = 2M | ALLE ANDEREN LÄNGEN SIND VOM UMTAUSCH UND DER RÜCKGABE AUSGESCHLOSSEN. LÄNGEN ÜBER 2M WERDEN MITTELS SPEDITION VERSENDET UND ERFORDERN EINE MINDESTBESTELLMENGE VON 10 STK.




STANDARD LENGTH = 2M | ALL OTHER LENGTHS ARE EXCLUDED FROM EXCHANGE AND RETURN. LENGTHS OVER 2M ARE SHIPPED BY FREIGHT CARRIER AND REQUIRE A MINIMUM ORDER QUANTITY OF 10 PCS.

### HINWEIS PLEASE NOTE

Kunststoff und Aluminium besitzen unterschiedliche Ausdehnungskoeffizienten, welche bei der Montage zu berücksichtigen sind. Ausgehend von 20°C verändert sich die Länge beim Aluminium um ca. 0,25mm pro Meter und beim Kunststoff um ca. 0,70mm pro Meter je 10°C Temperaturunterschied.

Plastic and aluminium have different expansion coefficients, which must be considered during assembly. Based on 20°C the length of aluminium changes approximately 0,25mm per meter and plastic approximately 0,70 mm per meter per 10°C of difference in temperature.






# LED Profile MFF | max. LED power per meter: 38W → 1 x Flexstrip 160 or 2 x Flexstrip 75

PROFIL ZUBEHÖR   PROFILE ACCESSORIES		
 <p><b>PZ-001-002</b> Seilabhänger 2m inkl. Deckenbefestigung Wire suspension 2m incl. ceiling fixture</p> <p><b>PZ-001-005</b> Seilabhänger 5m inkl. Deckenbefestigung Wire suspension 5m incl. ceiling fixture</p>	 <p><b>PZ-002-001</b> Seilstopper inkl. M4 Senkkopfschraube Wire stopper incl. M4 countersunk screw</p>	 <p><b>EK-100-002</b> Torx Bit TX8 für Endkappenschrauben Torx Bit TX8 for endcap screws</p>
 <p><b>PZ-006-001</b> Saugnapf 30mm Suction cup 30mm</p>		






## MFF PROFIL BESTÜCKT MIT 2 X FLEXSTRIP 36 RGB MIT EINEM LED ABSTAND VON 33MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN MFF PROFILE FITTED WITH 2 X FLEXSTRIP 36 RGB WITH A LED DISTANCE OF 33MM IN COMBINATION WITH THE DIFFERENT COVERS

PMMA Abdeckung MF Flach Transparent 91% Transmission	PMMA Abdeckung MF Flach Transp. 91% Transmission + Mikroprismatik Transp. 95% Transmission	PMMA Abdeckung MF Flach Transp. 91% Transmission + Mikroprismatik Opal 93% Transmission	PMMA Abdeckung MF Flach Opal 76% Transmission	PMMA Abdeckung MF Eckig Opal 76% Transmission
				
PMMA cover MF flat transparent 91% transmission	PMMA cover MF flat transparent 91% transmission + Microprismatic transparent 95% transmission	PMMA cover MF flat transparent 91% transmission + Microprismatic milky 93% transmission	PMMA cover MF flat milky 76% transmission	PMMA cover MF square milky 76% transmission

## MFF PROFIL BESTÜCKT MIT 2 X FLEXSTRIP 72 MIT EINEM LED ABSTAND VON 16,5MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN MFF PROFILE FITTED WITH 2 X FLEXSTRIP 72 WITH A LED DISTANCE OF 16,5MM IN COMBINATION WITH THE DIFFERENT COVERS

PMMA Abdeckung MF Flach Transparent 91% Transmission	PMMA Abdeckung MF Flach Transp. 91% Transmission + Mikroprismatik Transp. 95% Transmission	PMMA Abdeckung MF Flach Transp. 91% Transmission + Mikroprismatik Opal 93% Transmission	PMMA Abdeckung MF Flach Opal 76% Transmission	PMMA Abdeckung MF Eckig Opal 76% Transmission
				
PMMA cover MF flat transparent 91% transmission	PMMA cover MF flat transparent 91% transmission + Microprismatic transparent 95% transmission	PMMA cover MF flat transparent 91% transmission + Microprismatic milky 93% transmission	PMMA cover MF flat milky 76% transmission	PMMA cover MF square milky 76% transmission

## MFF PROFIL BESTÜCKT MIT 2 X FLEXSTRIP 48 ODER 72 DW MIT EINEM LED ABSTAND VON 7,15MM IN KOMBINATION MIT DEN UNTERSCH. ABDECKUNGEN MFF PROFILE FITTED WITH 2 X FLEXSTRIP 48 OR 72 DW WITH A LED DISTANCE OF 7,15MM IN COMBINATION WITH THE DIFFERENT COVERS

PMMA Abdeckung MF Flach Transparent 91% Transmission	PMMA Abdeckung MF Flach Transp. 91% Transmission + Mikroprismatik Transp. 95% Transmission	PMMA Abdeckung MF Flach Transp. 91% Transmission + Mikroprismatik Opal 93% Transmission	PMMA Abdeckung MF Flach Opal 76% Transmission	PMMA Abdeckung MF Eckig Opal 76% Transmission
				
PMMA cover MF flat transparent 91% transmission	PMMA cover MF flat transparent 91% transmission + Microprismatic transparent 95% transmission	PMMA cover MF flat transparent 91% transmission + Microprismatic milky 93% transmission	PMMA cover MF flat milky 76% transmission	PMMA cover MF square milky 76% transmission